


**LH ZS 20 EX W70 BP V2A (275 440)**



Figure without obligation

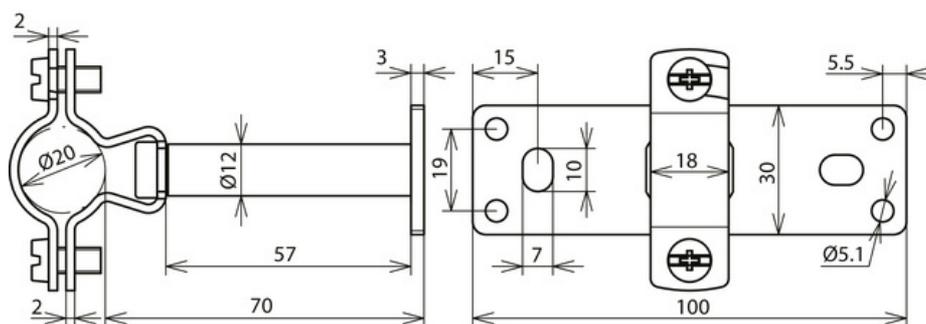

| Type                                          | LH ZS 20 EX W70 BP V2A                |
|-----------------------------------------------|---------------------------------------|
| Part No.                                      | 275 440                               |
| Material                                      | StSt                                  |
| Conductor support Rd                          | 20 mm                                 |
| Distance from wall                            | 70 mm                                 |
| Fixing                                        | [4x] Ø5.1 / [2x] 7 x 10 mm            |
| Screw                                         | ⚙ M6 x 14 mm                          |
| Material of screw                             | StSt                                  |
| Height of conductor holder                    | 20 mm                                 |
| Conductor routing                             | fixed                                 |
| Female thread                                 | M8                                    |
| Standard                                      | DIN IEC/TS 62561-8 (VDE V 0185-561-8) |
| Weight                                        | 152 g                                 |
| Customs tariff number (Comb. Nomenclature EU) | 85389099                              |
| GTIN                                          | 4013364146914                         |
| PU                                            | 10 pc(s)                              |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.