




Figure without obligation

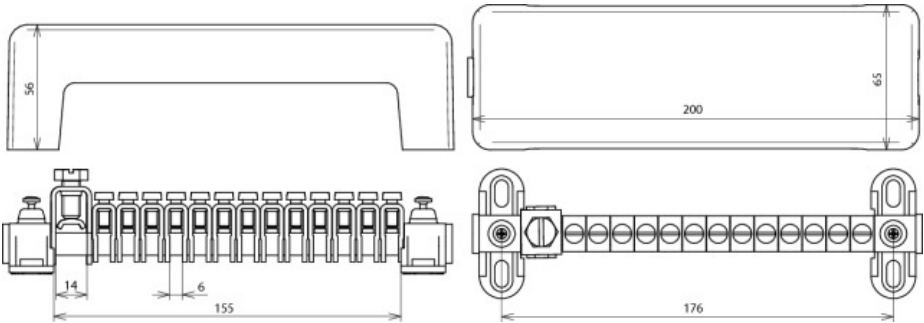

Arrangement: 

Type	PAS AH RK 13X25 1X8.10
Part No.	563 030
Connection (solid / stranded)	13x 2,5-25 mm ²
Connection Rd (solid / stranded / cable)	1x 8-10 mm or 16-95 mm ²
Clamping bar	brass/gal Sn
Cross section	100 mm ²
Fixing	[4x] 6 x 12 mm
Lightning current carrying capability (10/350 µs)	 ^{*)}
Continuous current test (25 A; ≤ 45 K)	passed ¹⁾
Standard	EN 62561-1
Weight	444 g
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364027824
PU	1 pc(s)

^{*)} For exact assignment, see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.