


Ordering Information

Dimensions

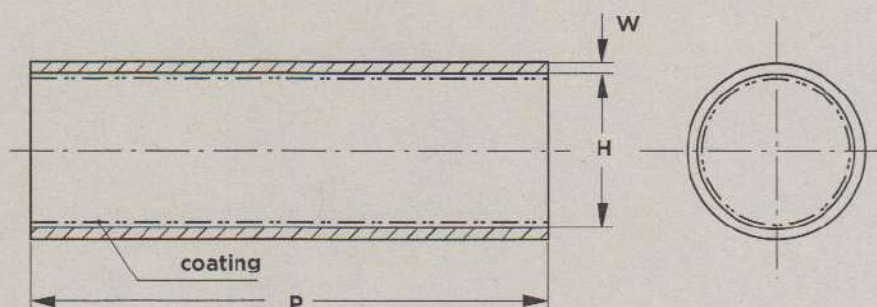

Notes:

1. Dimensions in millimeters

a = as supplied

b = after free recovery

1. Max. longitudinal change after free recovery: +5% / -10%

Raychem tubing WCSM is supplied complete with installation instructions.

Product Size	Application range		H		W	
	from mm	to mm	a min	b max	a nom	b min
WCSM 12/3	3.5	10	12	3	0.8	2.0
WCSM 16/4	4.5	14	16	4	0.9	2.4
WCSM 24/6	6.5	22	24	6	1.0	2.7
WCSM 34/8	9	31	33	8	1.3	4.0
WCSM 48/12	13	44	48	12	1.5	4.5
WCSM 56/16	17.5	50	56	16	1.5	4.4
WCSM 70/20	22	63	70	20	1.4	4.4
WCSM 90/25	27	81	90	25	1.3	4.3
WCSM 110/30	33	100	110	30	1.2	4.3
WCSM 130/35	38	118	130	35	1.2	4.3
WCSM 160/50	55	144	160	50	1.0	4.3
WCSM 180/50	55	162	180	50	1.0	4.3
WCSM 200/50	55	180	200	50	n.a.	4.3
WCSM 250/65	70	225	250	65	n.a.	4.3
WCSM 320/95	105	295	320	95	n.a.	4.3
WCSM 390/110	125	350	390	110	n.a.	4.3

Standard Lengths and Sealant

Lengths

All sizes are available in the standard lengths: 1000 mm and 1500 mm.

On request: other lengths and on spools.

All lengths subject to standard cutting tolerances.

Sealant

Raychem tubing WCSM are coated with an inner sealant wall. The sealant exhibits excellent bonding and sealing characteristics to all materials commonly used in the various cable insulation and sheath constructions, such as plastic, rubber, lead, and aluminium. Sealant /S (equivalent /243 and SI323) meets Raychem specification PPS 3012/76.

Ordering Example Part Number

WCSM 9/3-1500/S

Product Type _____

Size _____

Standard Length _____

/S = Sealant _____