

BD2-AK02X/F2258-3 TAP-OFF UNIT 63A / 1X 3POLE FUS E
SOCKET SP58

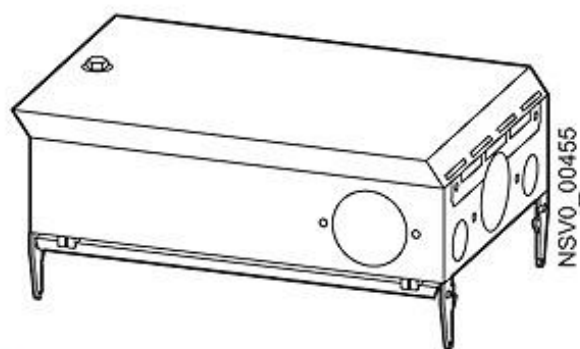


Figure similar

Model	
product designation	tap-off unit for BD2 busbar trunking system
operating voltage / at AC	
• at 50 Hz / rated value / maximum	400 V
• at 60 Hz / rated value / maximum	400 V
Protection class	
protection class IP	IP54
Main circuit	
operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	63 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	63 A

Connections

• connectable conductor cross-section / in the outgoing unit / minimum	0.75 mm ²
--	----------------------

Tap-off points

outgoing unit version	cable entry
design of short-circuit and overloading protection / in the outgoing unit	3-pole fuse base for three 22x58 mm cylinder fuses
Size of the outgoing feeder	02
number of poles / of the outgoing feeder	5

Mechanical Design

height	160 mm
width	214 mm
length	331 mm
number of width units	8
product component / locking mechanism	Yes

Certificates

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:262473>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:262473>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:262473

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>